



WAT Motor
Sanayi ve Ticaret A.Ş.



Three Phase Squirrel Cage Induction Motor

Motor Type: Q3H200L6D

Electrical Data

RATED VALUES							STARTING VALUES				BREAKDOWN	EFFICIENCY			EFFICIENCY CLASS
VOLTAGE	POWER		SPEED	CURRENT	TORQUE	Cos Φ	CURRENT		TORQUE		TORQUE				IEC 60034-30-1
							I _A / I _N		M _A / M _N		Mk/ Mn				
V	kW	Hz	rpm	A	Nm	4/4	Y	D	Y	D	Nm	4/4	3/4	2/4	IE
400/690	22	50	983,6	50,5/29,1	213,6	0,61		5,62		2,56	3,14	91,1	91	89,5	IE3
460/795	22	60	1183	45,2/26,1	177,6	0,65		5,36		2,84	4,15	93	92,9	92,4	IE3

Mechanical Data


Bearing DE	6312-ZZ	Color	Optional
Bearing NDE	6310-ZZ	Motor protection	Optional
Lubricants	Shell Gadus S5 V220-2	Method of cooling	IC 411
Condensation drain hole	No	Terminal box position	Top
External earthing terminal	Yes	Material of terminal box	Aluminium
Vibration class	A	Terminal plate thread	M8
Insulation class	F	Cable gland	1xM50
Duty type	S1	Clamping range	30-38 mm
Direction of rotation	Clockwise	Mounting type	IM 1001 (B3)
Housing material	Aluminum		
Type of balancing	Half Key		

Enviromental Data

Others

Ambient temperature	-20 / + 40 °C	Type of protection	IP56
Altitude above sea level	1000 m	Sound pressure level 50/60Hz	79 dBA
		Moment of inertia (kgm ²)	0,22166
		Standard	IEC 60034-1
		Weight (kg)	193,5

Dimensions

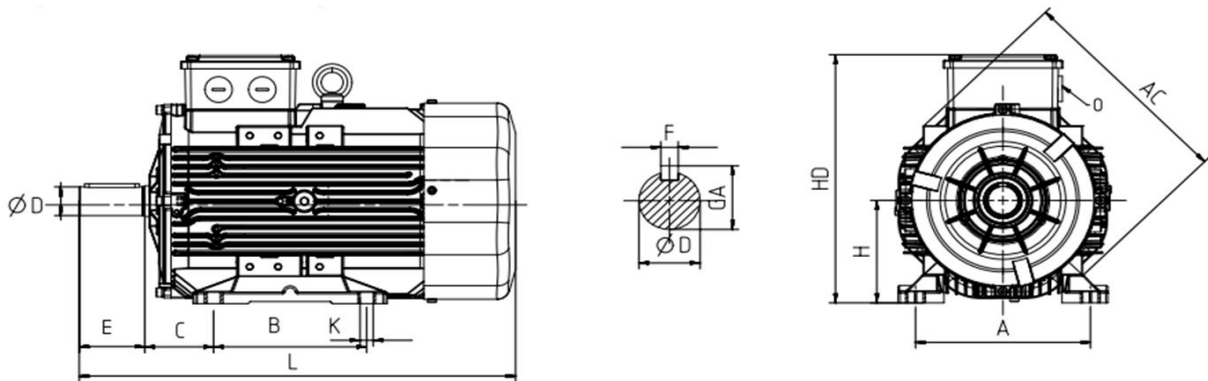

Main Dimensions		Foot Mounted Motors						Shaft				Flange Mounted Motors			
AC	L	B	A	H	HD	K	C	D	E	GA	F	P	N	M	S
349	759	267-305	318	200	455	18,5	133	55	110	59	16				