




WAT Motor
Sanayi ve Ticaret A.Ş.

Three Phase Squirrel Cage Induction Motor

Motor type Q3HGA90L4D40-KG



Electrical Data

RATED VALUES							STARTING VALUES				BREAKDOWN	EFFICIENCY			EFFICIENCY CLASS
VOLTAGE	POWER		SPEED	CURRENT	TORQUE	Cos ϕ	CURRENT		TORQUE		TORQUE	%			IEC 60034-30-1
	kW	Hz					Y	I _N D	M _A / M _N Y D	M _k / M _n Nm	4/4	3/4	2/4		
V			rpm	A	Nm	4/4	Y	D	Y	D	Nm	4/4	3/4	2/4	IE
230/400	1,5	50	1447	5,9/3,4	9,70	0,75	8,3	-	3,8	-	4,5	85,3	83,3	80,6	IE3
265/460	1,7	60	1748	5,7/3,3	9,40	0,76	8,1	-	3,6	-	4,4	-	-	-	

Mechanical Data


Bearing DE	6305-ZZ C3	Color	RAL 3009
Bearing NDE	6205-ZZ C3	Motor protection	-
Lubricants	Standart	Method of cooling	IC411 (TEFC)
Condensation drain hole	Optional	Terminal box position	Top
External earthing terminal	Yes	Material of terminal box	Cast Iron
Vibration class	A	Terminal plate thread	M5
Insulation Class	F	Cable gland	2xM25G
Duty type	S1	Clamping range	13-18 mm
Direction of rotation	CW/CCW	Mounting type	IM 2001 (B35)
Housing material	Cast Iron		
Type of balancing	H		

Environmental Data

Others

Ambient Temperature	-20 / + 40 °C	Type of protection	IP 56
Altitude above sea level	1000 m	Sound Pressure Level 50Hz dBA	53
		Moment of Inertia (kg.mm ²)	0,0052634
		Standard	IEC 60034-1

Dimensions

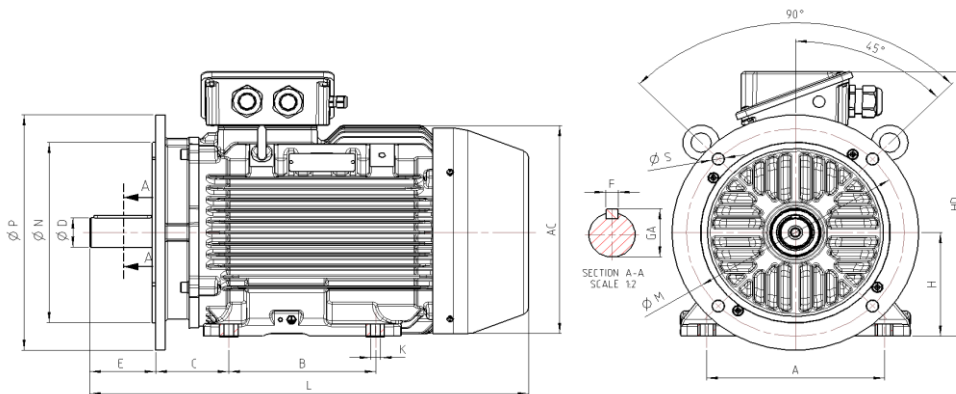

Main Dimensions		Foot Mounted Motors						Shaft				Flange Mounted Motors			
AC	L	B	A	H	HD	K	C	D	E	GA	F	P	N	M	S
185	367	125	140	90	232	10	56	24	50	27	8	200	130	165	12