



WAT Motor  
Sanayi ve Ticaret A.Ş.



## Three Phase Squirrel Cage Induction Motor

Motor Type: Q2EPB63M4A

### Electrical Data

| RATED VALUES |       |    |       |           |        |            | STARTING VALUES |   |             |   | BREAKDOWN    | EFFICIENCY |      |      | EFFICIENCY CLASS |
|--------------|-------|----|-------|-----------|--------|------------|-----------------|---|-------------|---|--------------|------------|------|------|------------------|
| VOLTAGE      | POWER |    | SPEED | CURRENT   | TORQUE | CoS $\Phi$ | CURRENT         |   | TORQUE      |   | TORQUE       |            |      |      | IEC 60034-30-1   |
| V            | kW    | Hz | rpm   | A         | Nm     | 4/4        | $I_A / I_N$     | D | $M_A / M_N$ | D | Mk/ Mn<br>Nm | 4/4        | 3/4  | 2/4  | IE               |
| 230/400      | 0,12  | 50 | 1375  | 0,76/0,44 | 0,8    | 0,70       | 3,7             |   | 3,0         |   | 3,0          | 59,1       | 58,4 | 51,3 | IE2              |
| 265/460      | 0,12  | 60 | 1708  | 0,65/0,37 | 0,7    | 0,61       | 3,53            |   | 4,11        |   | 3,97         | 66         | 65,2 | 57,9 | IE2              |
|              |       |    |       |           |        |            |                 |   |             |   |              |            |      |      |                  |
|              |       |    |       |           |        |            |                 |   |             |   |              |            |      |      |                  |

### Mechanical Data


|                            |                       |                          |                 |
|----------------------------|-----------------------|--------------------------|-----------------|
| Bearing DE                 | 6201-ZZ               | Color                    | Optional        |
| Bearing NDE                | 6201-ZZ               | Motor protection         | Optional        |
| Lubricants                 | Shell Gadus S2 V100Q2 | Method of cooling        | IC 411          |
| Condensation drain hole    | No                    | Terminal box position    | Top             |
| External earthing terminal | Yes                   | Material of terminal box | Aluminium       |
| Vibration class            | A                     | Terminal plate thread    | M4              |
| Insulation class           | F                     | Cable gland              | 1xM20           |
| Duty type                  | S1                    | Clamping range           | 10-14 mm        |
| Direction of rotation      | Clockwise             | Mounting type            | IM 2101 (B34-B) |
| Housing material           | Aluminum              |                          |                 |
| Type of balancing          | Half Key              |                          |                 |

### Enviromental Data

### Others

|                          |               |                                       |             |
|--------------------------|---------------|---------------------------------------|-------------|
| Ambient temperature      | -20 / + 40 °C | Type of protection                    | IP56        |
| Altitude above sea level | 1000 m        | Sound pressure level 50/60Hz          | dBA<br>48   |
|                          |               | Moment of inertia (kgm <sup>2</sup> ) | 0,00022     |
|                          |               | Standard                              | IEC 60034-1 |
|                          |               | Weight (kg)                           | 4,2         |

### Dimensions

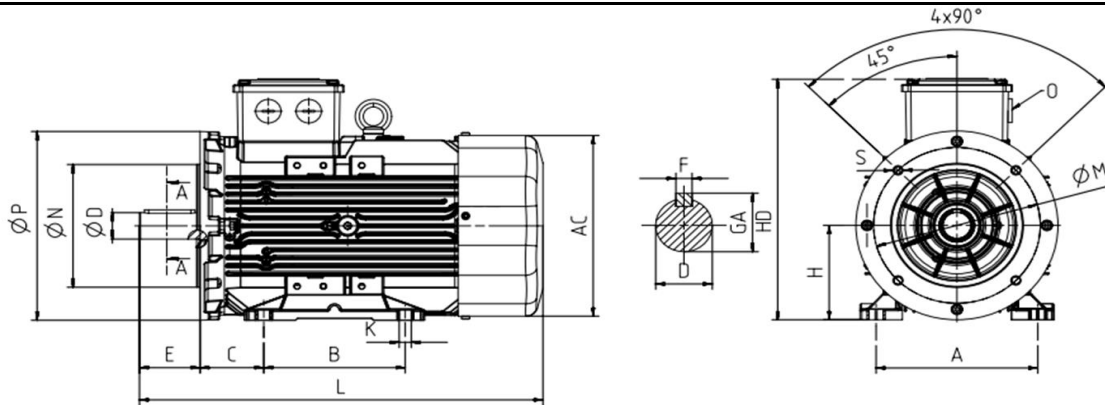

| Main Dimensions |     | Foot Mounted Motors |     |    |     |   |    | Shaft |    |      |   | Flange Mounted Motors |    |     |    |
|-----------------|-----|---------------------|-----|----|-----|---|----|-------|----|------|---|-----------------------|----|-----|----|
| AC              | L   | B                   | A   | H  | HD  | K | C  | D     | E  | GA   | F | P                     | N  | M   | S  |
| 123             | 220 | 80                  | 100 | 63 | 162 | 7 | 40 | 11    | 23 | 12,5 | 4 | 120                   | 80 | 100 | M6 |