



WAT Motor
Sanayi ve Ticaret A.Ş.



Motor type Q2MPB63M2A

Electrical Data

RATED VALUES							STARTING VALUES		BREAKDOWN	EFFICIENCY			CAPACITOR		EFFICIENCY CLASS
VOLTAGE	POWER		SPEED	CURRENT	TORQUE	Cos ϕ	CURRENT	TORQUE	TORQUE	%			Crun	Cstart	IEC 60034-30-1
V	kW	Hz	rpm	A	Nm	4/4	I_A / I_N	M_A / M_N	Mk/ Mn	4/4	3/4	2/4	μF	μF	IE
230	0,18	50	2783	1,4	0,6	0,96	3,7	0,8	2,3	IE2-60,4	54,6	44,7	10	—	IE2

Mechanical Data


Bearing DE	6201 ZZ	Color	RAL 6011
Bearing NDE	6201 ZZ	Motor protection	No
Lubricants	No	Method of cooling	IC 411
Condensation drain hole	No	Terminal box position	Top
External earthing terminal	Yes	Material of terminal box	Aluminium
Vibration class	A	Terminal plate thread	M4
Insulation Class	F	Cable gland	1xM20
Duty type	S1	Clamping range	10-14 mm
Direction of rotation	Counter Clockwise	Mounting type	IM 2101 (B34-B)
Housing material	Aluminium		
Type of balancing	Half Key		

Environmental Data

Others

Ambient Temperature	-20 / + 40 °C	Type of protection	IP55
Altitude above sea level	1000 m	Moment of Inertia (kg.mm ²)	0,00021
		Standard	IEC 60034-1

Dimensions

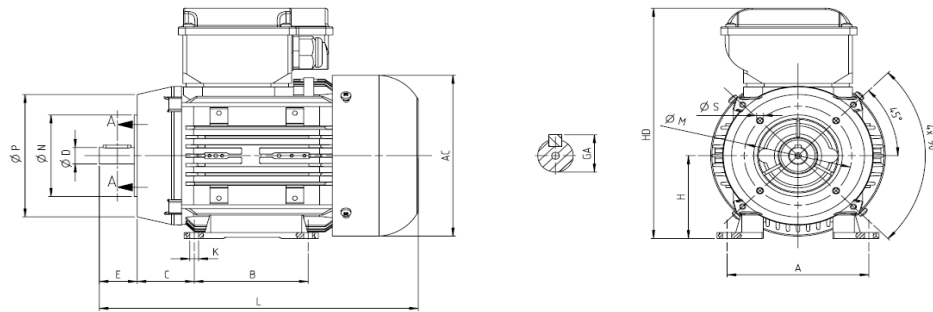

Main Dimensions		Foot Mounted Motors							Shaft				Flange Mounted Motors			
AC	L	B	A	H	HD	K	C	D	E	GA	F	P	N	M	R	
123	220	80	100	63	181,5	7	40	11	23	12,5	4	120	80	100	4	