



WAT Motor
Sanayi ve Ticaret A.Ş.



Three Phase Squirrel Cage Induction Motor

Motor Type: Q3H200L2C

Electrical Data

RATED VALUES							STARTING VALUES				BREAKDOWN	EFFICIENCY			EFFICIENCY CLASS
VOLTAGE	POWER		SPEED	CURRENT	TORQUE	Cos ϕ	CURRENT		TORQUE		TORQUE				IEC 60034-30-1
V	kW	Hz	rpm	A	Nm	4/4	I_A / I_N	D	M_A / M_N	D	Mk/ Mn Nm	4/4	3/4	2/4	IE
400/690	30	50	2969	54,1/31,2	96,5	0,86		10,7		3,1	5,1	93,3	93,2	92,2	IE3
460/795	30	60	3572	46,6/26,9	80,2	0,87		11,89		3,44	6,74	92,4	92,2	91,7	IE3

Mechanical Data


Bearing DE	6312-ZZ	Color	Optional
Bearing NDE	6310-ZZ	Motor protection	Optional
Lubricants	Shell Gadus S5 V220-2	Method of cooling	IC 411
Condensation drain hole	No	Terminal box position	Top
External earthing terminal	Yes	Material of terminal box	Aluminium
Vibration class	A	Terminal plate thread	M8
Insulation class	F	Cable gland	1xM50
Duty type	S1	Clamping range	30-38 mm
Direction of rotation	Clockwise	Mounting type	IM 1001 (B3)
Housing material	Aluminum		
Type of balancing	Half Key		

Enviromental Data

Others

Ambient temperature	-20 / + 40 °C	Type of protection	IP56
Altitude above sea level	1000 m	Sound pressure level 50/60Hz	79 dBA
		Moment of inertia (kgm ²)	0,10277
		Standard	IEC 60034-1
		Weight (kg)	143,0

Dimensions

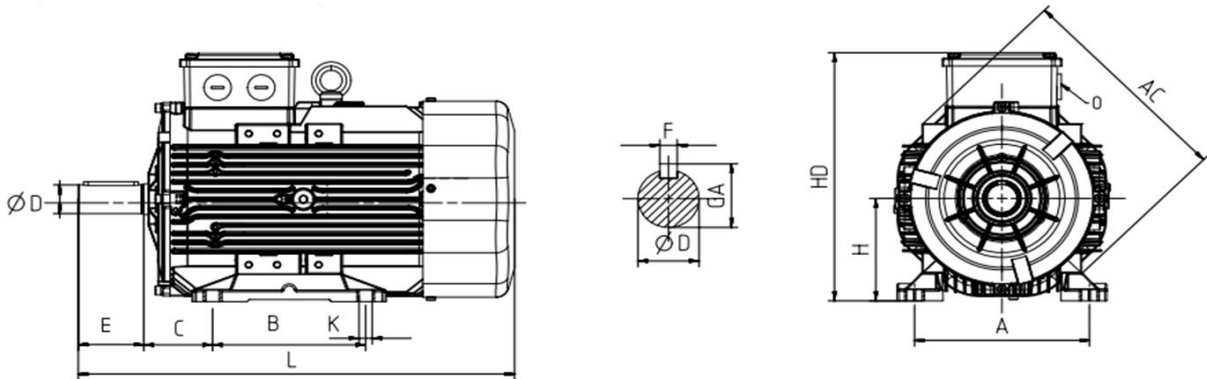

Main Dimensions		Foot Mounted Motors						Shaft				Flange Mounted Motors			
AC	L	B	A	H	HD	K	C	D	E	GA	F	P	N	M	S
349	706	267-305	318	200	455	18,5	133	55	110	59	16				