



Motor Type: Q3HFA200L2D

Electrical Data

[illegible]

Mechanical Data


Bearing DE	6312-ZZ	Color	Optional
Bearing NDE	6310-ZZ	Motor protection	Optional
Lubricants	Shell Gadus S5 V220-2	Method of cooling	IC 411
Condensation drain hole	No	Terminal box position	Top
External earthing terminal	Yes	Material of terminal box	Aluminium
Vibration class	A	Terminal plate thread	M8
Insulation class	F	Cable gland	1xM50
Duty type	S1	Clamping range	30-38 mm
Direction of rotation	Clockwise	Mounting type	IM 2101 (B34-B)
Housing material	Aluminium		
Type of balancing	Half Key		

Enviromental Data

Others

Ambient temperature	-20 / + 40 °C	Type of protection	IP56
Altitude above sea level	1000 m	Sound pressure level 50/60Hz	79 dBA
		Moment of inertia (kgm ²)	0,11383
		Standard	IEC 60034-1
		Weight (kg)	176,0

Dimensions

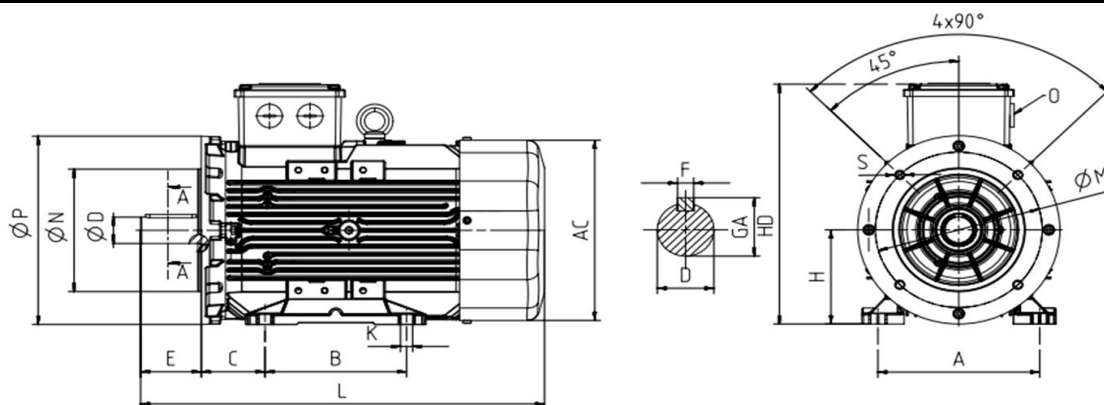

Main Dimensions		Foot Mounted Motors						Shaft				Flange Mounted Motors			
AC	L	B	A	H	HD	K	C	D	E	GA	F	P	N	M	S
349	706							55	110	59	16	400	300	350	18,5

B34b