




WAT Motor
Sanayi ve Ticaret A.Ş.



Three Phase Squirrel Cage Induction Motor

Motor Type: Q3HG280M6C

Electrical Data

RATED VALUES							STARTING VALUES				BREAKDOWN	EFFICIENCY			EFFICIENCY CLASS
VOLTAGE	POWER		SPEED	CURRENT	TORQUE	Cos Φ	CURRENT		TORQUE		TORQUE				IEC 60034-30-1
V	kW	Hz	rpm	A	Nm	4/4	I _A / I _N		M _A / M _N		Mk/ Mn	4/4	3/4	2/4	
							Y	D	Y	D	Nm				
400/690	45	50	992	85.6/49.4	433,2	0,80		5,50		1,90	2,40	93,7	93,3	91,9	IE3
460/795	45	60	1193	75.0/43.3	360,2	0,79		5,30		2,10	3,20	94,5	94,1	92,7	IE3

Mechanical Data


Bearing DE	6317 C3	Color	Optional
Bearing NDE	6317 C3	Motor protection	Optional
Lubricants	SHELL GADUS S5 V100 2	Method of cooling	IC 411
Condensation drain hole	No	Terminal box position	Top
External earthing terminal	Yes	Material of terminal box	Cast Iron
Vibration class	A	Terminal plate thread	M10
Insulation class	H	Cable gland	2xM50
Duty type	S1	Clamping range	30-38 mm
Direction of rotation	Clockwise	Mounting type	IM 1001 (B3)
Housing material	Cast Iron		
Type of balancing	Half Key		

Enviromental Data

Others

Ambient temperature	-20 / + 40 °C	Type of protection	IP56
Altitude above sea level	1000 m	Sound pressure level 50/60Hz	70 dBA
		Moment of inertia (kgm ²)	1,72100
		Standard	IEC 60034-1
		Weight (kg)	657,0

Dimensions

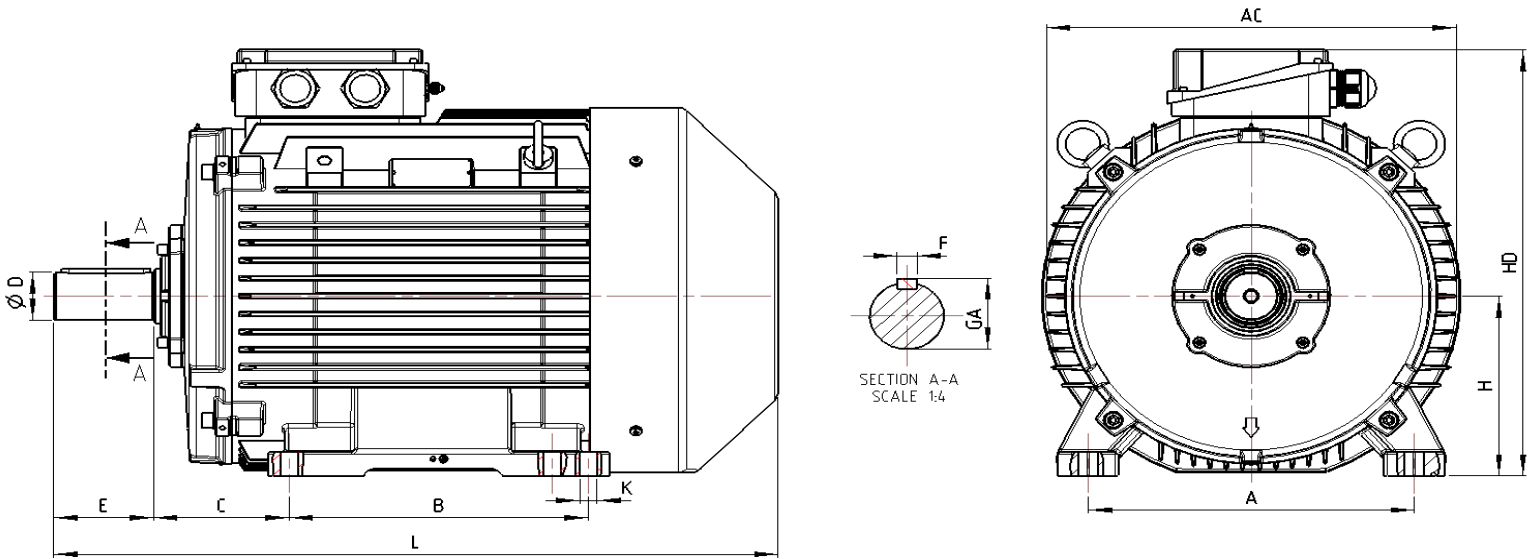

Main Dimensions		Foot Mounted Motors						Shaft				Flange Mounted Motors			
AC	L	B	A	H	HD	K	C	D	E	GA	F	P	N	M	S
574	1021	419	457	280	664	24	190	75	140	79,5	20	-	-	-	-