




WAT Motor
Sanayi ve Ticaret A.Ş.

Three Phase Squirrel Cage Induction Motor

Motor type Q3HGPA112M6D40-KG



Electrical Data

RATED VALUES							STARTING VALUES				BREAKDOWN	EFFICIENCY			EFFICIENCY CLASS
VOLTAGE	POWER		SPEED	CURRENT	TORQUE	Cos ϕ	CURRENT		TORQUE		TORQUE	%			IEC 60034-30-1
	I _A / I _N	M _A / M _N					M _k / M _n	4/4	3/4	2/4					
V	kW	Hz	rpm	A	Nm	4/4	Y	D	Y	D	Nm	4/4	3/4	2/4	IE
230/400	2,2	50	958	9,0/5,2	22,00	0,72	6,1	-	2,2	-	3,0	84,3	84,5	82,5	IE3
265/460	2,5	60	1158	8,8/5,1	20,80	0,72	5,9	-	2,1	0	2,9	-	0	0	

Mechanical Data


Bearing DE	6306-ZZ C3	Color	RAL 3009
Bearing NDE	6306-ZZ C3	Motor protection	-
Lubricants	Standart	Method of cooling	IC411 (TEFC)
Condensation drain hole	Optional	Terminal box position	Top
External earthing terminal	Yes	Material of terminal box	Cast Iron
Vibration class	A	Terminal plate thread	M5
Insulation Class	F	Cable gland	2xM25G
Duty type	S1	Clamping range	13-18 mm
Direction of rotation	CW/CCW	Mounting type	IM 2001 (B35)
Housing material	Cast Iron		
Type of balancing	H		

Environmental Data

Others

Ambient Temperature	-20 / + 40 °C	Type of protection	IP 56
Altitude above sea level	1000 m	Sound Pressure Level 50Hz dBA	57
		Moment of Inertia (kg.mm ²)	0,0138288
		Standard	IEC 60034-1

Dimensions

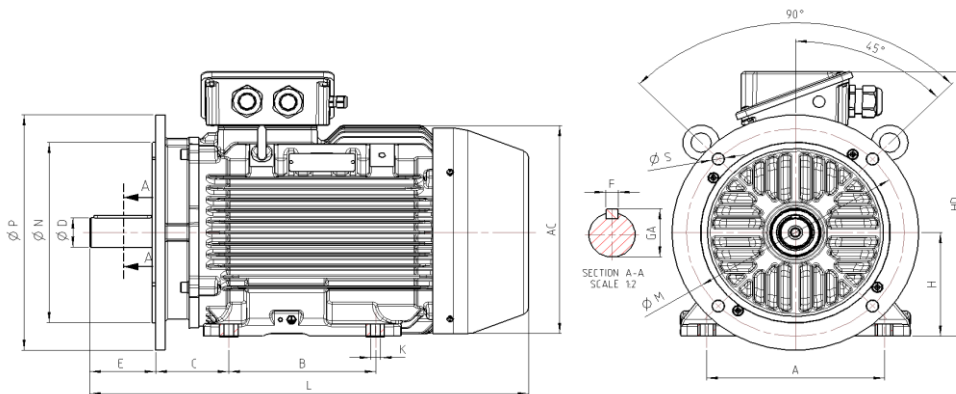

Main Dimensions		Foot Mounted Motors						Shaft				Flange Mounted Motors			
AC	L	B	A	H	HD	K	C	D	E	GA	F	P	N	M	S
222	459	140	190	112	290	12	70	28	60	31	8	250	180	215	14,5