




WAT Motor
Sanayi ve Ticaret A.Ş.

Three Phase Squirrel Cage Induction Motor

Motor type Q3HGPA90L6C40-KG



Electrical Data

RATED VALUES							STARTING VALUES				BREAKDOWN	EFFICIENCY			EFFICIENCY CLASS	
VOLTAGE	POWER		SPEED	CURRENT	TORQUE	Cos φ	CURRENT		TORQUE		TORQUE	%			IEC 60034-30-1	
	kW	Hz					Y	I _N D	M _A / M _N Y D	Mk/ Mn Nm	4/4	3/4	2/4			
V	kW	Hz	rpm	A	Nm	4/4	Y	-	D	-	Nm	4/4	3/4	2/4	IE	
230/400	0,75	50	950	3,6/2,1	7,54	0,67	4,9	-		2,5	-	3,0	79	78,5	75,1	IE3
265/460	0,86	60	1150	3,45/2,0	7,16	0,67	4,8	-		2,4	-	3,0	-	-	-	

Mechanical Data


Bearing DE	6305-ZZ C3	Color	RAL 3009
Bearing NDE	6205-ZZ C3	Motor protection	-
Lubricants	Standart	Method of cooling	IC411 (TEFC)
Condensation drain hole	Optional	Terminal box position	Top
External earthing terminal	Yes	Material of terminal box	Cast Iron
Vibration class	A	Terminal plate thread	M5
Insulation Class	F	Cable gland	2xM25G
Duty type	S1	Clamping range	13-18 mm
Direction of rotation	CW/CCW	Mounting type	IM 2001 (B35)
Housing material	Cast Iron		
Type of balancing	H		

Environmental Data

Others

Ambient Temperature	-20 / + 40 °C	Type of protection	IP 56
Altitude above sea level	1000 m	Sound Pressure Level 50Hz dBA	53
		Moment of Inertia (kg.mm ²)	0,0046
		Standard	IEC 60034-1

Dimensions

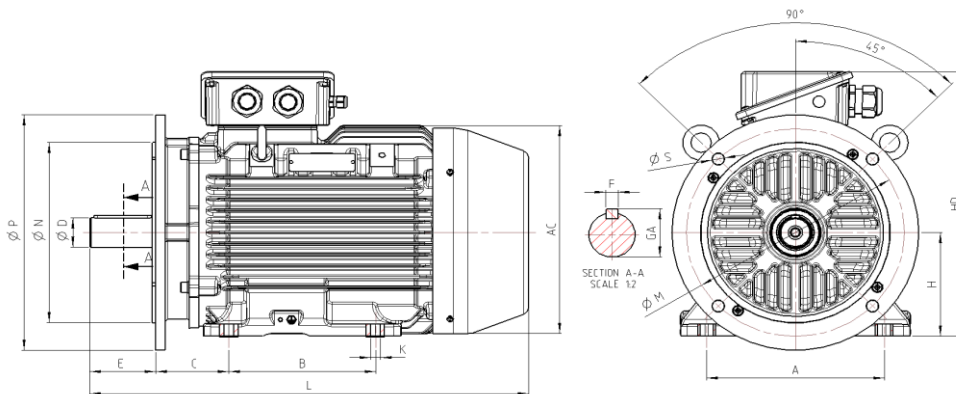

Main Dimensions		Foot Mounted Motors						Shaft				Flange Mounted Motors			
AC	L	B	A	H	HD	K	C	D	E	GA	F	P	N	M	S
185	367	125	140	90	232	10	56	24	50	27	8	200	130	165	12