

Three Phase Squirrel Cage Induction Motor

Motor type Q3HGPA90L6D40-KG

Electrical Data

[illegible]

Mechanical Data


Bearing DE	6305-ZZ C3	Color	RAL 3009
Bearing NDE	6205-ZZ C3	Motor protection	-
Lubricants	Standart	Method of cooling	IC411 (TEFC)
Condensation drain hole	Optional	Terminal box position	Top
External earthing terminal	Yes	Material of terminal box	Cast Iron
Vibration class	A	Terminal plate thread	M5
Insulation Class	F	Cable gland	2xM25G
Duty type	S1	Clamping range	13-18 mm
Direction of rotation	CW/CCW	Mounting type	IM 2001 (B35)
Housing material	Cast Iron		
Type of balancing	H		

Environmental Data

Others

Ambient Temperature	-20 / + 40 °C	Type of protection	IP 56
Altitude above sea level	1000 m	Sound Pressure Level 50Hz dBA	53
		Moment of Inertia (kg.mm2)	0,0052777
		Standard	IEC 60034-1

Dimensions

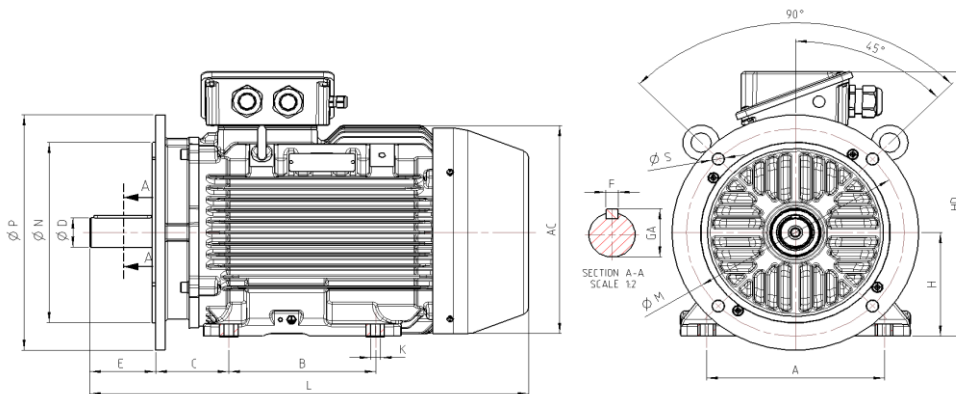

Main Dimensions		Foot Mounted Motors						Shaft				Flange Mounted Motors			
AC	L	B	A	H	HD	K	C	D	E	GA	F	P	N	M	S
185	367	125	140	90	232	10	56	24	50	27	8	200	130	165	12