




WAT Motor
Sanayi ve Ticaret A.Ş.

Three Phase Squirrel Cage Induction Motor

Motor type Q3HGPC80M2D40-KG



Electrical Data

RATED VALUES							STARTING VALUES				BREAKDOWN	EFFICIENCY			EFFICIENCY CLASS
VOLTAGE	POWER		SPEED	CURRENT	TORQUE	Cos φ	CURRENT		TORQUE		TORQUE	%			IEC 60034-30-1
	kW	Hz					I _A / I _N	M _A / M _N	M _k / M _N	4/4	3/4	2/4			
V			rpm	A	Nm	4/4	Y	D	Y	D	Nm	4/4	3/4	2/4	IE
230/400	1,1	50	2900	4,15/2,4	3,60	0,81	7,4	-	3,5	-	4,3	82,7	80,2	76,4	IE3
265/460	1,27	60	3504	4,0/2,3	3,50	0,81	7,2	-	3,4	-	4,2	-	-	-	

Mechanical Data


Bearing DE	6204 ZZ C3	Color	RAL 3009
Bearing NDE	6204 ZZ C3	Motor protection	-
Lubricants	Standart	Method of cooling	IC411 (TEFC)
Condensation drain hole	Optional	Terminal box position	Top
External earthing terminal	Yes	Material of terminal box	Cast Iron
Vibration class	A	Terminal plate thread	M4
Insulation Class	F	Cable gland	2xM25G
Duty type	S1	Clamping range	13-18 mm
Direction of rotation	CW/CCW	Mounting type	IM 2101 (B34-A)
Housing material	Cast Iron		
Type of balancing	H		

Environmental Data

Others

Ambient Temperature	-20 / + 40 °C	Type of protection	IP 56
Altitude above sea level	1000 m	Sound Pressure Level 50Hz dBA	57
		Moment of Inertia (kg.mm ²)	0,0016953
		Standard	IEC 60034-1

Dimensions

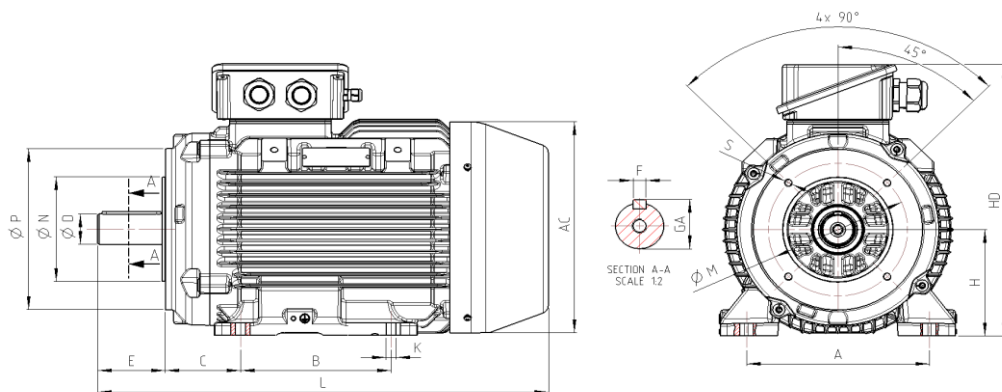

Main Dimensions		Foot Mounted Motors						Shaft				Flange Mounted Motors			
AC	L	B	A	H	HD	K	C	D	E	GA	F	P	N	M	S
175	317	100	125	80	225	10	50	19	40	21,5	6	120	80	100	M6