




Motor Type: Q3HPC132S6A

[illegible]

<i>Bearing DE</i>	6208-ZZ	<i>Color</i>	Optional
<i>Bearing NDE</i>	6208-ZZ	<i>Motor protection</i>	Optional
<i>Lubricants</i>	Shell Gadus S5 V220-2	<i>Method of cooling</i>	IC 411
<i>Condensation drain hole</i>	No	<i>Terminal box position</i>	Top
<i>External earthing terminal</i>	Yes	<i>Material of terminal box</i>	Aluminium
<i>Vibration class</i>	A	<i>Terminal plate thread</i>	M6
<i>Insulation class</i>	F	<i>Cable gland</i>	1xM32
<i>Duty type</i>	S1	<i>Clamping range</i>	18-25 mm
<i>Direction of rotation</i>	Clockwise	<i>Mounting type</i>	IM 2101 (B34-A)
<i>Housing material</i>	Aluminum		
<i>Type of balancing</i>	Half Key		

Others

Ambient temperature	-20 / + 40 °C	Type of protection	IP56
Altitude above sea level	1000 m	Sound pressure level 50/60Hz	73 dBA
		Moment of inertia (kgm ²)	0,03560
		Standard	IEC 60034-1
		Weight (kg)	52,8

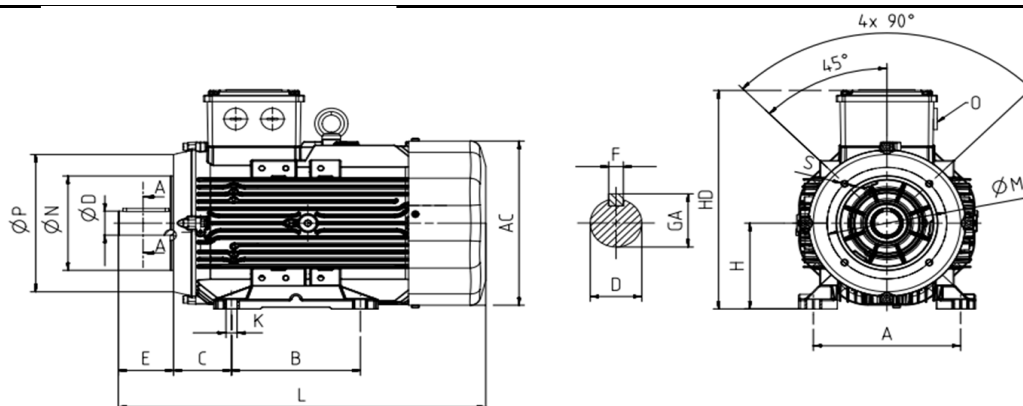

Main Dimensions		Foot Mounted Motors						Shaft				Flange Mounted Motors			
AC	L	B	A	H	HD	K	C	D	E	GA	F	P	N	M	S
260	481	140-178	216	132	328	12	89	38	80	41	10	200	130	165	M10