



WAT Motor
Sanayi ve Ticaret A.Ş.



Three Phase Squirrel Cage Induction Motor

Motor Type: Q3HSFB132S2C

Electrical Data

RATED VALUES							STARTING VALUES			BREAKDOWN	EFFICIENCY			EFFICIENCY CLASS
VOLTAGE	POWER		SPEED	CURRENT	TORQUE	Cos Φ	CURRENT		TORQUE	TORQUE				IEC 60034-30-1
V	kW	Hz	rpm	A	Nm	4/4	I_A / I_N	D	M_A / M_N	Mk/ Mn Nm	4/4	3/4	2/4	IE
400/690	5,5	50	2920	10,5/6,1	18,0	0,86		12,2	5,0	6,1	89,2	88,9	87,5	IE3
460/795	5,5	60	3533	8,6/5	14,9	0,89		13,6	5,6	8,1	89,5	89,2	87,6	IE3

Mechanical Data


Bearing DE	6208-ZZ	Color	Optional
Bearing NDE	6206-ZZ	Motor protection	Optional
Lubricants	Shell Gadus S5 V220-2	Method of cooling	IC 411
Condensation drain hole	No	Terminal box position	Top
External earthing terminal	Yes	Material of terminal box	Aluminium
Vibration class	A	Terminal plate thread	M5
Insulation class	F	Cable gland	1xM25
Duty type	S1	Clamping range	18-25 mm
Direction of rotation	Clockwise	Mounting type	IM 3601 (B14-B)
Housing material	Aluminum		
Type of balancing	Half Key		

Enviromental Data

Others

Ambient temperature	-20 / + 40 °C	Type of protection	IP56
Altitude above sea level	1000 m	Sound pressure level 50/60Hz	dBA 71
		Moment of inertia (kgm ²)	0,00772
		Standard	IEC 60034-1
		Weight (kg)	36,2

Dimensions

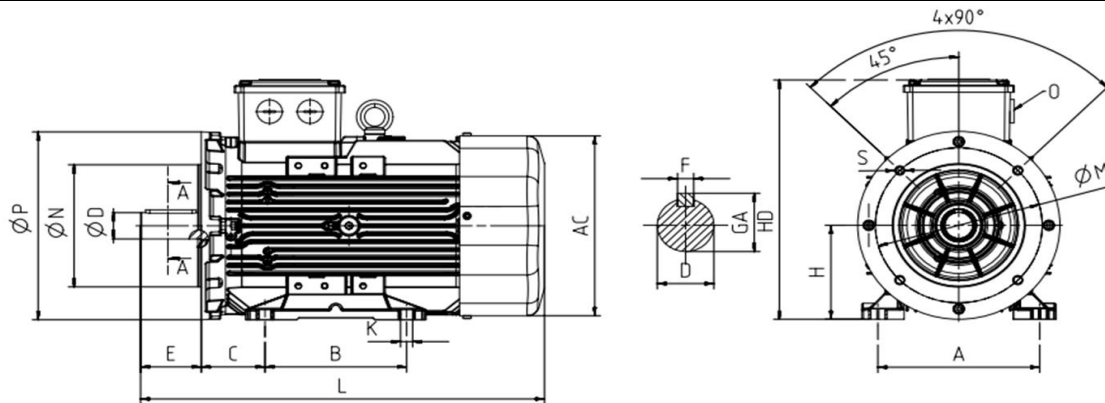

Main Dimensions		Foot Mounted Motors						Shaft				Flange Mounted Motors			
AC	L	B	A	H	HD	K	C	D	E	GA	F	P	N	M	S
210	422	—	—	—	—	—	—	38	80	41	10	250	180	215	M12