




WAT Motor
Sanayi ve Ticaret A.Ş.

Three Phase Squirrel Cage Induction Motor

Motor type Q3HSGPA160M2D40-KI



Electrical Data

RATED VALUES							STARTING VALUES				BREAKDOWN	EFFICIENCY			EFFICIENCY CLASS
VOLTAGE	POWER		SPEED	CURRENT	TORQUE	Cos Φ	CURRENT		TORQUE		TORQUE	%			IEC 60034-30-1
V	kW	Hz	rpm	A	Nm	4/4	I_A / I_N	I_D	M_A / M_N	M_D	Mk/ Mn Nm	4/4	3/4	2/4	IE
400/690	11	50	2940	20,8/12,0	35,80	0,82	-	11,8	-	4,8	6,5	91,2	90,7	89,3	IE3
460/795	12,7	60	3522	19,9/11,5	34,20	0,87	-	11,4	-	4,5	6,4	-	-	-	

Mechanical Data


Bearing DE	6309-ZZ C3	Color	RAL 3009
Bearing NDE	6309-ZZ C3	Motor protection	-
Lubricants	Standart	Method of cooling	IC411 (TEFC)
Condensation drain hole	Optional	Terminal box position	Top
External earthing terminal	Yes	Material of terminal box	Cast Iron
Vibration class	A	Terminal plate thread	M6
Insulation Class	F	Cable gland	2xM32G+1xM12G
Duty type	S1	Clamping range	18-25 mm
Direction of rotation	CW/CCW	Mounting type	IM 2001 (B35)
Housing material	Cast Iron		
Type of balancing	H		

Environmental Data

Others

Ambient Temperature	-20 / + 40 °C	Type of protection	IP 56
Altitude above sea level	1000 m	Sound Pressure Level 50Hz dBA	71
		Moment of Inertia (kg.mm ²)	0,0401501
		Standard	IEC 60034-1

Dimensions

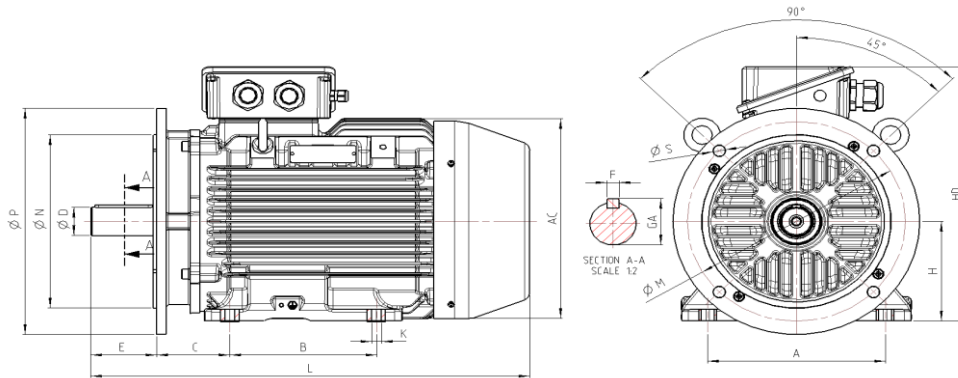

Main Dimensions		Foot Mounted Motors						Shaft				Flange Mounted Motors			
AC	L	B	A	H	HD	K	C	D	E	GA	F	P	N	M	S
273	563	210	254	160	366	14,5	108	42	110	45	12	350	250	300	18,5