



WAT Motor  
Sanayi ve Ticaret A.Ş.



## Three Phase Squirrel Cage Induction Motor

Motor Type: Q4EFB71M4C

### Electrical Data

| RATED VALUES |       |    |       |          |        |       | STARTING VALUES                 |   |        |                                 | BREAKDOWN | EFFICIENCY |      |      | EFFICIENCY CLASS |     |
|--------------|-------|----|-------|----------|--------|-------|---------------------------------|---|--------|---------------------------------|-----------|------------|------|------|------------------|-----|
| VOLTAGE      | POWER |    | SPEED | CURRENT  | TORQUE | cos Φ | CURRENT                         |   | TORQUE |                                 | TORQUE    |            |      |      | IEC 60034-30-1   |     |
| V            | kW    | Hz | rpm   | A        | Nm     | 4/4   | I <sub>A</sub> / I <sub>N</sub> | Y | D      | M <sub>A</sub> / M <sub>N</sub> | Mk / Mn   | 4/4        | 3/4  | 2/4  | IE               |     |
| 230/400      | 0,37  | 50 | 1438  | 1,7/1    | 2,5    | 0,67  | 6,2                             |   |        | 3,7                             |           | 3,9        | 81,1 | 77,9 | 73,7             | IE4 |
| 265/460      | 0,37  | 60 | 1747  | 1,6/0,91 | 2,0    | 0,65  | 5,8                             |   |        | 4,1                             |           | 5,1        | 81,5 | 78,3 | 74,1             | IE4 |
|              |       |    |       |          |        |       |                                 |   |        |                                 |           |            |      |      |                  |     |
|              |       |    |       |          |        |       |                                 |   |        |                                 |           |            |      |      |                  |     |

### Mechanical Data


|                            |                       |                          |                 |
|----------------------------|-----------------------|--------------------------|-----------------|
| Bearing DE                 | 6202-ZZ               | Color                    | Optional        |
| Bearing NDE                | 6202-ZZ               | Motor protection         | Optional        |
| Lubricants                 | Shell Gadus S2 V100Q2 | Method of cooling        | IC 411          |
| Condensation drain hole    | No                    | Terminal box position    | Top             |
| External earthing terminal | Yes                   | Material of terminal box | Aluminium       |
| Vibration class            | A                     | Terminal plate thread    | M4              |
| Insulation class           | F                     | Cable gland              | 1xM20           |
| Duty type                  | S1                    | Clamping range           | 10-14 mm        |
| Direction of rotation      | Clockwise             | Mounting type            | IM 3601 (B14-B) |
| Housing material           | Aluminum              |                          |                 |
| Type of balancing          | Half Key              |                          |                 |

### Enviromental Data

### Others

|                          |               |                                       |             |
|--------------------------|---------------|---------------------------------------|-------------|
| Ambient temperature      | -20 / + 40 °C | Type of protection                    | IP56        |
| Altitude above sea level | 1000 m        | Sound pressure level 50/60Hz          | dBA 45      |
|                          |               | Moment of inertia (kgm <sup>2</sup> ) | 0,00119     |
|                          |               | Standard                              | IEC 60034-1 |
|                          |               | Weight (kg)                           | 9,3         |

### Dimensions

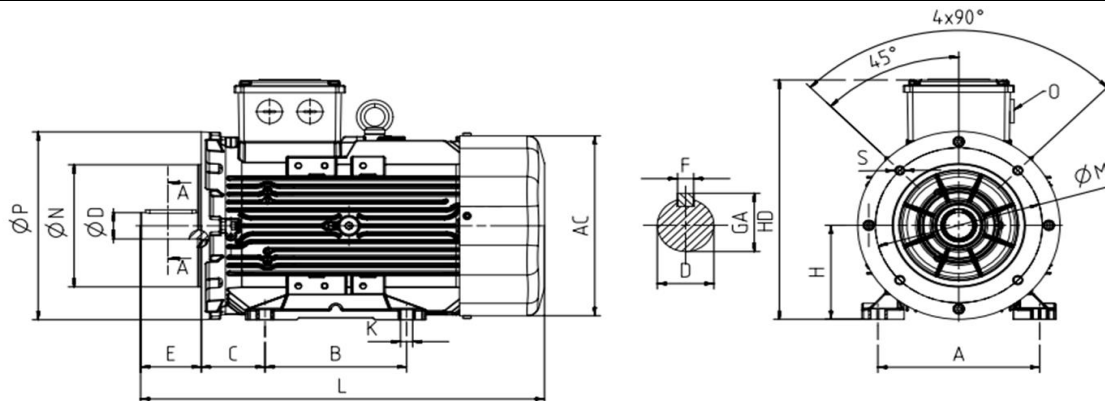

| Main Dimensions |     | Foot Mounted Motors |   |   |    |   |   | Shaft |    |    |   | Flange Mounted Motors |    |     |    |
|-----------------|-----|---------------------|---|---|----|---|---|-------|----|----|---|-----------------------|----|-----|----|
| AC              | L   | B                   | A | H | HD | K | C | D     | E  | GA | F | P                     | N  | M   | S  |
| 138             | 262 | —                   | — | — | —  | — | — | 14    | 30 | 16 | 5 | 140                   | 95 | 115 | M8 |