



WAT Motor
Sanayi ve Ticaret A.Ş.



Three Phase Squirrel Cage Induction Motor

Motor Type: Q4H160L4C

Electrical Data

RATED VALUES							STARTING VALUES				BREAKDOWN	EFFICIENCY			EFFICIENCY CLASS
VOLTAGE	POWER		SPEED	CURRENT	TORQUE	Cos ϕ	CURRENT		TORQUE		TORQUE				IEC 60034-30-1
V	kW	Hz	rpm	A	Nm	4/4	I_A / I_N	D	M_A / M_N	D	Mk/ Mn Nm	4/4	3/4	2/4	IE
400/690	15	50	1478	33,7/19,5	96,9	0,69		7,7		3,3	4,0	93,9	93,1	92,1	IE4
460/795	15	60	1781	29,7/17,2	80,4	0,68		7,4		2,6	4,6	94,1	93	92	IE4

Mechanical Data


Bearing DE	6309-ZZ	Color	Optional
Bearing NDE	6209-ZZ	Motor protection	Optional
Lubricants	Shell Gadus S5 V220-2	Method of cooling	IC 411
Condensation drain hole	No	Terminal box position	Top
External earthing terminal	Yes	Material of terminal box	Aluminium
Vibration class	A	Terminal plate thread	M6
Insulation class	F	Cable gland	1xM32
Duty type	S1	Clamping range	18-25 mm
Direction of rotation	Clockwise	Mounting type	IM 1001 (B3)
Housing material	Aluminum		
Type of balancing	Half Key		

Environmental Data

Others

Ambient temperature	-20 / + 40 °C	Type of protection	IP56
Altitude above sea level	1000 m	Sound pressure level 50/60Hz	63 dBA
		Moment of inertia (kgm ²)	0,10511
		Standard	IEC 60034-1
		Weight (kg)	116,0

Dimensions

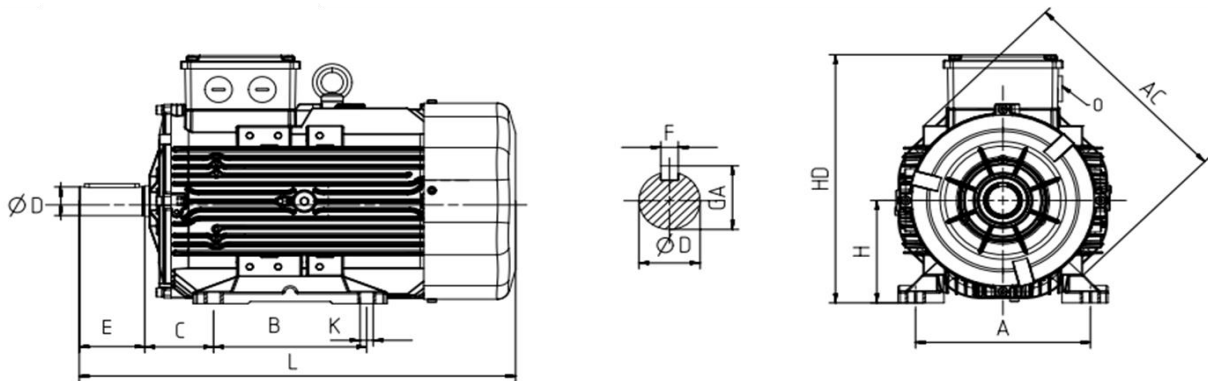

Main Dimensions		Foot Mounted Motors						Shaft				Flange Mounted Motors			
AC	L	B	A	H	HD	K	C	D	E	GA	F	P	N	M	S
305	622	210-254	254	160	378	14,5	108	42	110	45	12				