




WAT Motor
Sanayi ve Ticaret A.Ş.

Three Phase Squirrel Cage Induction Motor

Motor Type: Q4HGPA315S6C40



Electrical Data

RATED VALUES							STARTING VALUES			BREAKDOWN	EFFICIENCY			EFFICIENCY CLASS	
VOLTAGE	POWER		SPEED	CURRENT	TORQUE	Cos Φ	CURRENT		TORQUE	TORQUE				IEC 60034-30-1	
V	kW	Hz	rpm	A	Nm	4/4	I_A / I_N	D	M_A / M_N	Mk/ Mn Nm	4/4	3/4	2/4	IE	
400/690	75	50	991	143.5/82.9	722,7	0,79		5,50		2,00	2,50	95,4	95,4	94,8	IE4

Mechanical Data


Bearing DE	6319 C3	Color	Optional
Bearing NDE	6319 C3	Motor protection	Optional
Lubricants	SHELL GADUS S5 V100 2	Method of cooling	IC 411
Condensation drain hole	No	Terminal box position	Top
External earthing terminal	Yes	Material of terminal box	Cast Iron
Vibration class	A	Terminal plate thread	M12
Insulation class	F	Cable gland	2xM63
Duty type	S1	Clamping range	34-44mm
Direction of rotation	Clockwise	Mounting type	IM 2001 (B35)
Housing material	Cast Iron		
Type of balancing	Half Key		

Enviromental Data

Others

Ambient temperature	-20 / + 40 °C	Type of protection	IP56
Altitude above sea level	1000 m	Sound pressure level 50/60Hz	83 dBA
		Moment of inertia (kgm ²)	3,42000
		Standard	IEC 60034-1
		Weight (kg)	

Dimensions

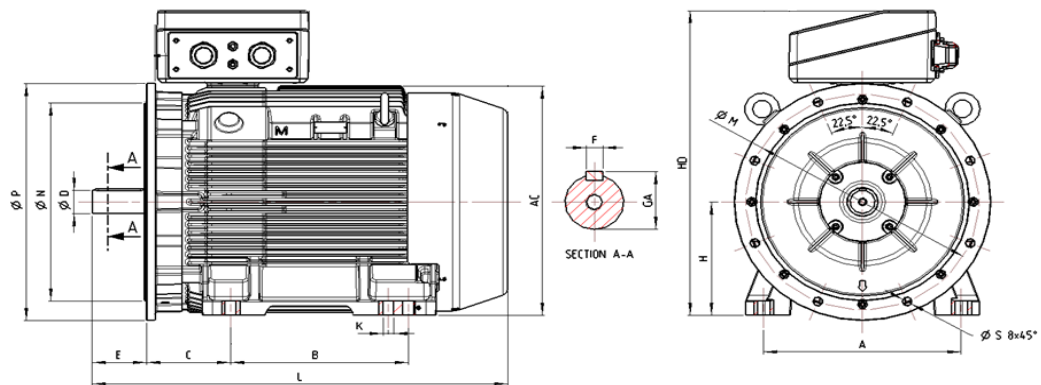

Main Dimensions		Foot Mounted Motors						Shaft				Flange Mounted Motors			
AC	L	B	A	H	HD	K	C	D	E	GA	F	P	N	M	S
645	1030	406	508	315	771	28	216	80	170	85	22	660	550	600	24

B34b