



WAT Motor
Sanayi ve Ticaret A.Ş.



Three Phase Squirrel Cage Induction Motor

Motor Type: Q4HPA225M4D

Electrical Data

RATED VALUES							STARTING VALUES				BREAKDOWN	EFFICIENCY			EFFICIENCY CLASS
VOLTAGE	POWER		SPEED	CURRENT	TORQUE	CoS Φ	CURRENT		TORQUE		TORQUE				IEC 60034-30-1
V	kW	Hz	rpm	A	Nm	4/4	I_A / I_N	D	M_A / M_N	D	Mk/ Mn Nm	4/4	3/4	2/4	IE
400/690	37	50	1485	68,8/39,9	237,9	0,82		9,2		3,1	5,1	95,2	94,9	94,3	IE4
460/795	37	60	1787	60,5/35	197,7	0,81		7,6		2,2	4,2	95,4	95	94,4	IE4

Mechanical Data


Bearing DE	6313-ZZ	Color	Optional
Bearing NDE	6313-ZZ	Motor protection	Optional
Lubricants	Shell Gadus S5 V220-2	Method of cooling	IC 411
Condensation drain hole	No	Terminal box position	Top
External earthing terminal	Yes	Material of terminal box	Aluminium
Vibration class	A	Terminal plate thread	M10
Insulation class	F	Cable gland	1xM50
Duty type	S1	Clamping range	30-38 mm
Direction of rotation	Clockwise	Mounting type	IM 2001 (B35)
Housing material			
Type of balancing	Half Key		

Enviromental Data

Others

Ambient temperature	-20 / + 40 °C	Type of protection	IP56
Altitude above sea level	1000 m	Sound pressure level 50/60Hz	dBA 71
		Moment of inertia (kgm ²)	0,36400
		Standard	IEC 60034-1
		Weight (kg)	246,0

Dimensions

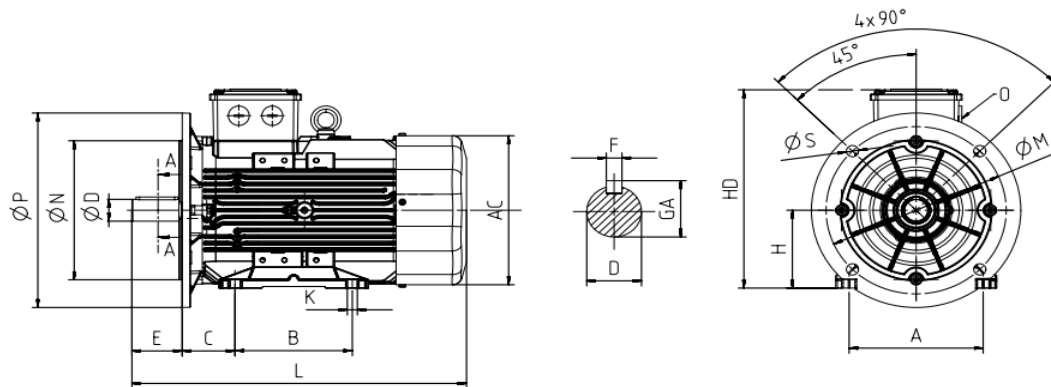

Main Dimensions		Foot Mounted Motors						Shaft				Flange Mounted Motors			
AC	L	B	A	H	HD	K	C	D	E	GA	F	P	N	M	S
456	765	286-311	356	225	485	18,5	149	60	140	64	18	450	350	400	18,5

B34b