



WAT Motor  
Sanayi ve Ticaret A.Ş.

## Three Phase Squirrel Cage Induction Motor

Motor Type: Q4HPB112M4E



### Electrical Data

| RATED VALUES |       |    |       |         |        |            | STARTING VALUES |      |             | BREAKDOWN    | EFFICIENCY |      |      | EFFICIENCY CLASS |
|--------------|-------|----|-------|---------|--------|------------|-----------------|------|-------------|--------------|------------|------|------|------------------|
| VOLTAGE      | POWER |    | SPEED | CURRENT | TORQUE | Cos $\Phi$ | CURRENT         |      | TORQUE      | TORQUE       |            |      |      | IEC 60034-30-1   |
| V            | kW    | Hz | rpm   | A       | Nm     | 4/4        | $I_A / I_N$     | D    | $M_A / M_N$ | Mk/ Mn<br>Nm | 4/4        | 3/4  | 2/4  | IE               |
| 400/690      | 4     | 50 | 1452  | 8,3/4,8 | 26,3   | 0,78       |                 | 9,40 | 3,80        | 4,50         | 91,1       | 90,4 | 89,7 | IE4              |
| 460/795      | 4     | 60 | 1758  | 4,2/2,4 | 21,7   | 0,76       |                 | 7,80 | 2,70        | 3,70         | 91         | 90,3 | 89,6 | IE4              |
|              |       |    |       |         |        |            |                 |      |             |              |            |      |      |                  |
|              |       |    |       |         |        |            |                 |      |             |              |            |      |      |                  |

### Mechanical Data


|                            |                       |                          |                 |
|----------------------------|-----------------------|--------------------------|-----------------|
| Bearing DE                 | 6306-ZZ               | Color                    | Optional        |
| Bearing NDE                | 6205-ZZ               | Motor protection         | Optional        |
| Lubricants                 | Shell Gadus S2 V100Q2 | Method of cooling        | IC 411          |
| Condensation drain hole    | No                    | Terminal box position    | Top             |
| External earthing terminal | Yes                   | Material of terminal box | Aluminium       |
| Vibration class            | A                     | Terminal plate thread    | M5              |
| Insulation class           | F                     | Cable gland              | 1xM25           |
| Duty type                  | S1                    | Clamping range           | 13-18 mm        |
| Direction of rotation      | Clockwise             | Mounting type            | IM 2101 (B34-B) |
| Housing material           | Aluminum              |                          |                 |
| Type of balancing          | Half Key              |                          |                 |

### Enviromental Data

### Others

|                          |               |                                       |             |
|--------------------------|---------------|---------------------------------------|-------------|
| Ambient temperature      | -20 / + 40 °C | Type of protection                    | IP56        |
| Altitude above sea level | 1000 m        | Sound pressure level 50/60Hz          | dBA 57      |
|                          |               | Moment of inertia (kgm <sup>2</sup> ) | 0,01527     |
|                          |               | Standard                              | IEC 60034-1 |
|                          |               | Weight (kg)                           | 40,0        |

### Dimensions

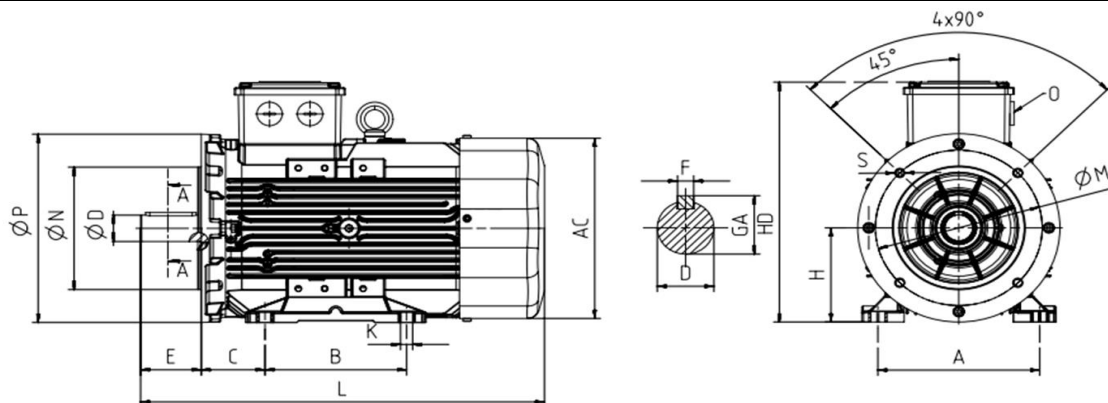

| Main Dimensions |     | Foot Mounted Motors |     |     |     |    |    | Shaft |    |    |   | Flange Mounted Motors |     |     |     |
|-----------------|-----|---------------------|-----|-----|-----|----|----|-------|----|----|---|-----------------------|-----|-----|-----|
| AC              | L   | B                   | A   | H   | HD  | K  | C  | D     | E  | GA | F | P                     | N   | M   | S   |
| 210             | 421 | 140                 | 190 | 112 | 265 | 12 | 70 | 28    | 60 | 31 | 8 | 200                   | 130 | 165 | M10 |

B34b