



WAT Motor
Sanayi ve Ticaret A.Ş.



Smoke Extraction Motor F400 2 Hour EN 12101-3

Motor Type: S3HG90L2C40-KG

Electrical Data

RATED VALUES							STARTING VALUES				BREAKDOWN	EFFICIENCY			EFFICIENCY CLASS
VOLTAGE	POWER		SPEED	CURRENT	TORQUE	CoS Φ	CURRENT		TORQUE		TORQUE				IEC 60034-30-1
V	kW	Hz	rpm	A	Nm	4/4	I _A / I _N	D	M _A / M _N	D	Mk / Mn Nm	4/4	3/4	2/4	IE
230/400	1,5	50	2930	5,5/3,1	4,9	0,86	9,50		3,10		4,30	IE3-84,2	86,2	84,2	IE3
265/460	1,5	60	3534	4.8/2.8	4,1	0,85	9,03		2,95		4,09	IE3-85,5	87,5	85,5	IE3

Mechanical Data


Bearing DE	6305 ZZ C4 DUPONT260C ORS	Color	Optional
Bearing NDE	6205 ZZ C4 DUPONT260C ORS	Motor protection	Optional
Lubricants	Dupont GPL 226 Krytox (260 C°)	Method of cooling	IC 418
Condensation drain hole	No	Terminal box position	Top
External earthing terminal	Yes	Material of terminal box	Cast Iron
Vibration class	A	Cable gland	M25x1.5
Insulation class	H	Clamping range	13-18
Duty type	S1	Mounting type	IM 1001 (B3)
Direction of rotation	Clockwise		
Housing material	Cast Iron		
Type of balancing	Half Key		

Enviromental Data

Others

Ambient temperature	-20 / + 40 °C	Type of protection	IP56
Altitude above sea level	1000 m	Sound pressure level 50/60Hz	dBA 62
		Moment of inertia (kgm ²)	0,00249
		Standard	IEC 60034-1
		Weight (kg)	26,2
		Resistance to fire	400 C° 2 Hour F400 EN 12101-3

Dimensions

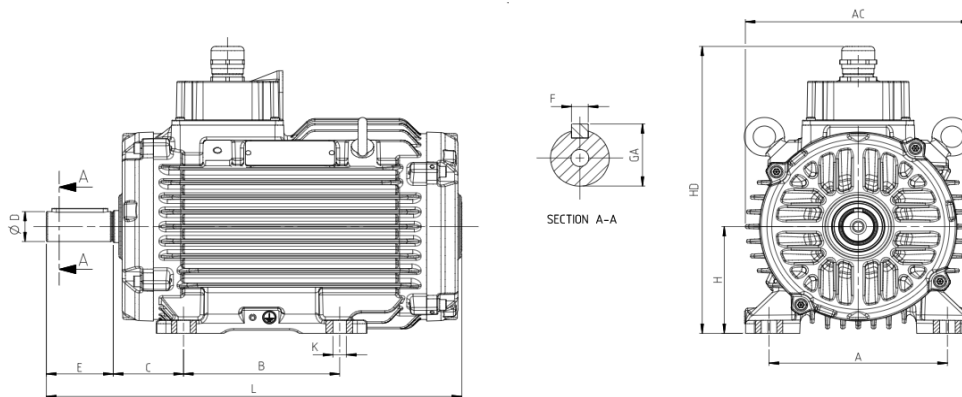

Main Dimensions		Foot Mounted Motors						Shaft				Flange Mounted Motors			
AC	L	B	A	H	HD	K	C	D	E	GA	F	P	N	M	S
185	295	100	140	90	242	10	56	24	50	27	8				