




WAT Motor
Sanayi ve Ticaret A.Ş.

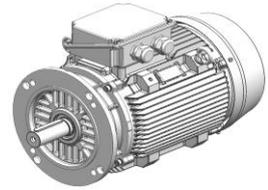

Three Phase Squirrel Cage Induction Motor

Motor type Q3HGFA132M6A40-KG

Electrical Data

RATED VALUES							STARTING VALUES				BREAKDOWN	EFFICIENCY			EFFICIENCY CLASS			
VOLTAGE	POWER		SPEED	CURRENT	TORQUE	cos φ	CURRENT		TORQUE		TORQUE	%			IEC 60034-30-1			
V	kW	Hz	rpm	A	Nm	4/4	I _A / I _N	Y	D	M _A / M _N	Y	D	Mk / Mn	Nm	4/4	3/4	2/4	IE
400/690	4	50	975	15,7/9,1	39,30	0,72	5,5	-	1,7	-	2,7	86,8	88	86,7				IE3
460/795	4,6	60	1175	15,4/8,9	37,50	0,73	5,3	-	1,6	0	2,6	-	-	-				

Mechanical Data


Bearing DE	6308-ZZ C3	Color	RAL 3009
Bearing NDE	6308-ZZ C3	Motor protection	-
Lubricants	Standart	Method of cooling	IC411 (TEFC)
Condensation drain hole	Optional	Terminal box position	Top
External earthing terminal	Yes	Material of terminal box	Cast Iron
Vibration class	A	Terminal plate thread	M6
Insulation Class	F	Cable gland	2xM32G
Duty type	S1	Clamping range	18-25 mm
Direction of rotation	CW/CCW	Mounting type	IM 3001 (B5)
Housing material	Cast Iron		
Type of balancing	H		

Environmental Data

Others

Ambient Temperature	-20 / + 40 °C	Type of protection	IP 56
Altitude above sea level	1000 m	Sound Pressure Level 50Hz dBA	60
		Moment of Inertia (kg.mm ²)	0,0403
		Standard	IEC 60034-1

Dimensions

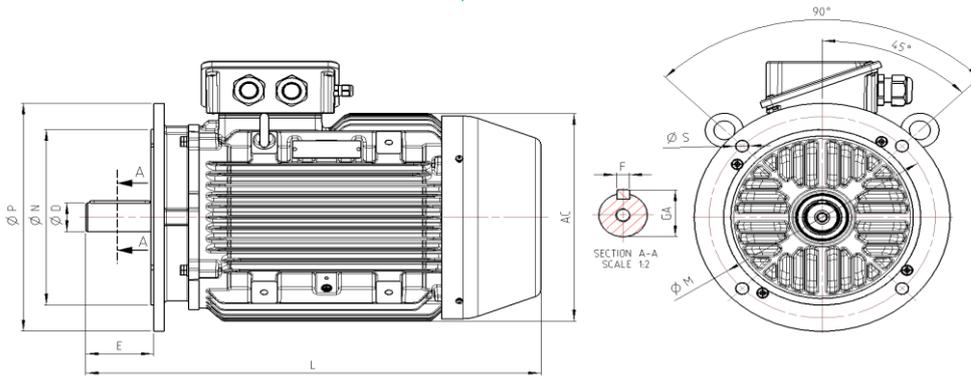

Main Dimensions		Foot Mounted Motors						Shaft				Flange Mounted Motors			
AC	L	B	A	H	HD	K	C	D	E	GA	F	P	N	M	S
273	533	-	-	-	-	-	-	38	80	41	10	300	230	265	14,5